




# PROWRAP™-SA

**MATERIAL:** Polypropylene  
**COLOR:** Red  
**COVERAGE:** 400 Sqft


## PRODUCT DESCRIPTION

Grip-Rite® ProWrap™-SA is a self-adhering spunbonded polypropylene weather resistive barrier that is engineered to be vapor permeable, moisture protection barrier, and an air barrier for use in residential and commercial sidewall construction.

## PRODUCT STRUCTURE

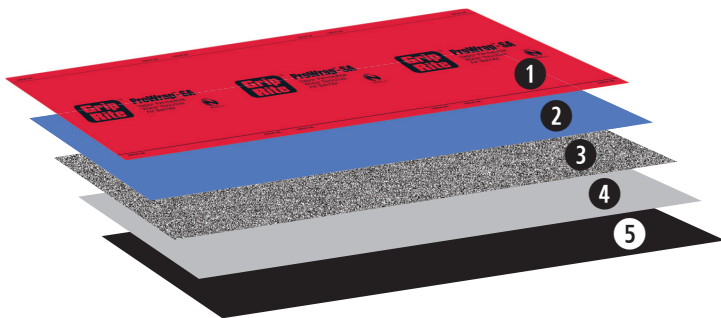

5-Layer Proprietary Construction

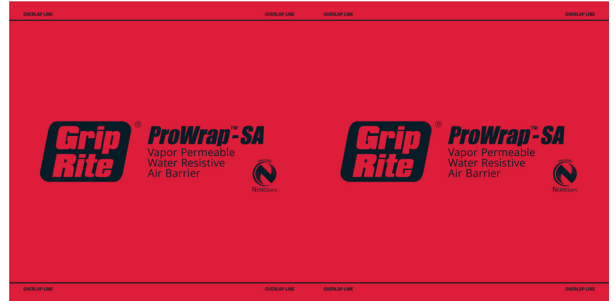

## GRIP-RITE® PROWRAP™-SA HAS BEEN TESTED TO MEET THE FOLLOWING MATERIAL STANDARDS:

- ICC-ES AC308
- Section 3.3: Physical Properties
- Section 3.5: Adhesion Performance per AAMA 711
- Section 3.6: Air Barrier Material per ASTM E2178
- Section 4.3: Drainage Efficiency per ASTM E2273
- Section 5.3.2, Exception 2: Flame Resistant per ASTM E1354 and ASTM E84

## GRIP-RITE® PROWRAP™-SA IS CERTIFIED TO FOLLOWING MATERIAL STANDARDS:

- ICC-ES AC308

## GRIP-RITE® PROWRAP™-SA CARRIES THE FOLLOWING CODE COMPLIANCE DOCUMENTATION:

- 2021 IBC/IRC Compliance:  
NEMO NER-PSBP-002 D4614250J



View Installation Instructions

## PROPERTIES AND STANDARDS

PROPERTY	TEST STANDARD	GRIP-RITE® PROWRAP™-SA
Thickness	ASTM D5147	19 mil
Dry breaking force	ASTM D3054	MD: 55 lbf; XMD: 45 lbf
Water resistance	ASTCC TM 127: 55-cm hydrostatic head for 5-hrs.	Control and weathered: No leakage
Water vapor transmission/permeance	ASTM E96, Procedure A (desiccant)	WVT: 411 g/m <sup>2</sup> per 24 hrs
		Permeance: 60 perms
Low temperature flexibility	AC38, Section 3.3.4	No cracks at 20°F
90-degree peel adhesion	AAMA 711, Section 5.3	> 1.5 lbf/in Anodized aluminum, DensGlass® Sheathing, OSB, plywood, vinyl and its own facing
Accelerated UV aging	AAMA 711, Section 5.4: 336-hours, ASTM G154, Cycle 1	No visual damage and maintain adhesion performance over anodized aluminum
Elevated temperature exposure	AAMA 711, Section 5.5: Level 3 (7-days at 176°F)	No visual damage and maintain adhesion performance over anodized aluminum
Thermal cycling	AAMA 711, Section 5.6: 10 cycles of 8-hrs. at 120°F and 16-hrs. at -40°F	No visual damage and maintain adhesion performance over anodized aluminum
Water immersion	AAMA 711, Section 5.8: 7 days immersion at 73°F	No visual damage and maintain adhesion performance over anodized aluminum
Resistance to peeling from itself	AAMA 711, Section 5.9: Level 1 (7-days at 122°F)	No visible damage, bond loss, buckling or rippling
Sealability around nail	AAMA 711, Sections 5.2.1 and 5.2.2; ASTM D7349, Protocol 4 per D1970	Control and after thermal cycling: No leakage
Air leakage rate	ASTM E2178	0.02 L/s-m <sup>2</sup> at 75 Pa
Drainage efficiency	ASTM E2273 per AC38, Section 4.3	> 90% efficiency
Fire test response	ASTM E1354	Heat release rate: 143 kW/m <sup>2</sup>
		Total heat released: 5 MJ/m <sup>2</sup>
		Effective heat of combustion: 18 MJ/kg
Surface burning characteristics	ASTM E84	Flame Spread Index (FSI): 0
		Smoke Developed Index (SDI): 40

## PRODUCT

SKU	SIZE		COLOR	WEIGHT/ ROLL	PAL/ QTY	PAL/ TRUCK	ROLLS/ TRUCKLOAD
	AREA	DIMENSIONS					
HWPRO4100SA	4sq	4x100	Red	19lbs	36	38	1368

**PRIME SOURCE**  
BUILDING PRODUCTS, INC.

A PrimeSource® Brands Company 

Contact your PrimeSource® Building Products representative to order today.  
**800-676-7777 | primesourcebp.com**



Grip-Rite® ProWrap™-SA is exclusively distributed by PrimeSource® Building Products, Inc. 1321 Greenway Drive, Irving, TX 75038-2504. Visit [grip-rite.com](http://grip-rite.com) or call 800-676-7777 for details, warranty information and limitations. Pricing and availability are subject to change without notice. © 2024 PrimeSource® Building Products, Inc. All Rights Reserved.

PSBGRPWSASS0324